

Product Catalog

Leveraging this industry-leading heritage, we promise to provide outstanding products to our customers around the world.



BEST QUALITY BEST PRICE

Major Performance



Fresh has been dedicated to being a commercial refrigeration company that offers product quality which meets the customer's satisfaction at competitive price. To achieve the recognition, Fresh has constantly focused on innovation and investment in cutting-edge technology and facilities throughout the business years. Leveraging this industry-leading heritage, we promise to deliver outstanding products to our customers all over the world. I do consider our customer's business successes and want to be their supportive partner. Our goal is to provide the best solution through endless improvements and best service beyond the needs of industry.

Table of Contents

REACH IN

Reach In Bottom Mount Fridge & Freezer 8

Reach In Top Mount Fridge & Freezer10

FOOD PREP TABLE

Salad & Sandwich Prep Table - Door 14

Salad & Sandwich Prep Table - Drawer16

Megatop Sandwich Prep Table - Door 18

Megatop Sandwich Prep Table - Drawer 20

Pizza Prep Table - Door22

Pizza Prep Table - Drawer24

Under Counter & Worktop

Undercounter Refrigerator & Freezer 28

Undercounter Refrigerator - Drawer 30

Worktop Refrigerator - Door 32

Worktop Refrigerator - Drawer 34

CHEF BASE

Chef Base 38

UNDER BAR EQUIPMENT

Direct Draw Beer Dispenser 42

Bottle Cooler 44

Back Bars - Solid Door 46

Back Bars - Glass Door 48

Narrow Depth Back Bar - Solid Door 50

Narrow Depth Back Bar - Glass Door 52

DISPLAY CASE

Vertical Open Air Display - Solid Side 56

Vertical Open Air Display - Glass Side 58

Counter Top Refrigerator 60

Bakery Case 62

BLAST CHILLER

Blast Freezer/Chiller 66



REACH IN

- **Reach In Bottom Mount Refrigerator & Freezer**
- **Reach In Top Mount Refrigerator & Freezer**



Reach In Bottom Mount Refrigerator & Freezer

FEATURES & BENEFITS



FRB-23RS-HC
FRB-23FS-HC



FRB-49RS-HC
FRB-49FS-HC



FRB-72RS-HC
FRB-72FS-HC

Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors
Galvanized steel finished back and bottom
Modern and durable one-piece grill

Insulation PE Coated Sturdy Wire Shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Door

Auto-closing doors & stopper
Door pressure release device
Sturdy and easy grip handles and Doors that open effortlessly
Magnetic door gasket provides easy-to-remove feature for cleaning or replacement feature
Door sensor with magnetic switch and door locks (Standard)

Automatic Evaporation & Defrost System

Digital Temperature Control & Monitor System

Flush mounted digital controller with fast cooling feature

Hot Gas Condensate System

4" Heavy Duty Casters with Brakes Standard

Safety Shielded LED Lighting Interior.

Bright and clear interior LED for excellent visibility

Refrigerator Holds Product Temperature 32°F~41°F

Freezer Holds Product Temperature Below 0°F

Left Hinged Model Available (23RS-HC/23FS-HC)

SPECIFICATIONS


Model	Capacity (cu.ft)		Exterior Dimension (inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/115/60)	HP	Refrig. coil	No. Shelves	No. Doors	Remarks
	Gross	Net	W	D	H									
FRB-23RS-HC	19.8	17.5	27 1/8	31 1/8	78 1/2	238	256	3.5	115/60/1	3/8	R290	3	1	Refrigerator
FRB-49RS-HC	43.7	38.6	54 5/8	31 1/8	78 1/2	364	401	3.7	115/60/1	3/8	R290	6	2	Refrigerator
FRB-72RS-HC	67.5	58.7	82 1/8	31 1/8	78 1/2	485	551	4.5	115/60/1	3/8	R290	9	3	Refrigerator
FRB-23FS-HC	19.8	17.5	27 1/8	31 1/8	78 1/2	265	282	6.2	115/60/1	1/2	R290	3	1	Freezer
FRB-49FS-HC	43.7	38.6	54 5/8	31 1/8	78 1/2	388	428	7.0	115/60/1	3/4	R290	6	2	Freezer
FRB-72FS-HC	67.5	58.7	82 1/8	31 1/8	78 1/2	511	578	8.5	115/60/1	3/4	R290	9	3	Freezer

* Heights do not include 4" casters



PLAN VIEWS




FRB-23RS-HO
FRB-23FS-HO



FRB-49RS-HO
FRB-49FS-HO

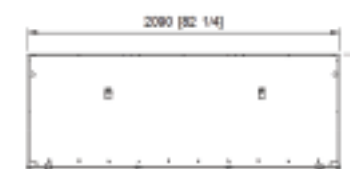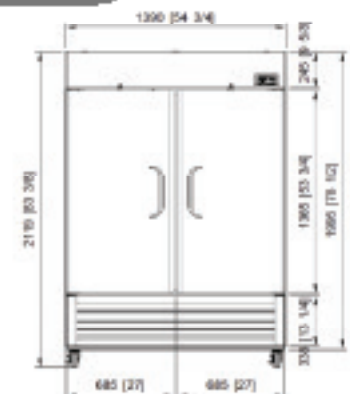

FRB-72RS-HO
FRB-72FS-HO

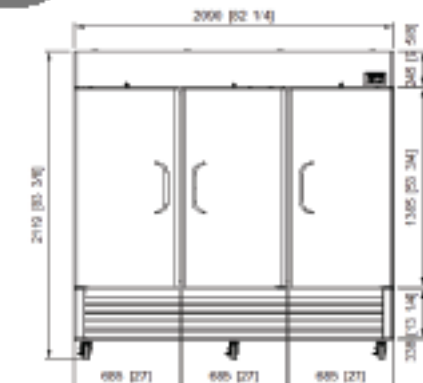

ALL SIDE



Reach In Top Mount Refrigerator & Freezer

FEATURES & BENEFITS



FTM-23RS-HC
FTM-23FS-HC



FTM-49RS-HC
FTM-49FS-HC



FTM-72RS-HC
FTM-72FS-HC

Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors
Galvanized steel finished back and bottom
Modern and durable one-piece grill

Insulation PE Coated Sturdy Wire Shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Door

Auto-closing doors & stopper
Door pressure release device
Sturdy and easy grip handles and doors that open effortlessly
Magnetic door gasket provides easy to remove for cleaning or replacement
Door sensor with magnetic switch and door locks (Standard)

Automatic Evaporation & Defrost System

Digital Temperature Control & Monitor System

Flush mounted digital controller with fast cooling feature

Hot Gas Condensate System

4" Heavy Duty Casters with Brakes Standard

Safety shielded LED lighting Interior.

Bright and clear interior LED for excellent visibility

Refrigerator Holds Product Temperature 32°F~41°F

Freezer Holds Product Temperature Below 0°F


Left Hinged Model Available (23RS-HC/23FS-HC)

SPECIFICATIONS

Model	Capacity (cu.ft)		Exterior Dimension (inch)			Net Weight (lb)	Gross Weight (lb/kg)	Amps	Voltage (V/Hz/Ph)	HP	Refrig-erant	No. Shelves	No. Doors	Remarks
	Gross	Net	W	D	H									
FTM-23RS-HC	19.8	18.5	27 1/8	31 1/8	77 3/4	229	247	3.5	115/60/1	3/8	R290	3	1	Refrigerator
FTM-49RS-HC	43.7	40.8	54 3/4	31 1/8	77 3/4	331	368	3.7	115/60/1	3/8	R290	6	2	Refrigerator
FTM-72RS-HC	67.5	63	82 1/4	31 1/8	77 3/4	450	516	4.5	115/60/1	3/8	R290	9	3	Refrigerator
FTM-23FS-HC	19.8	18.5	27 1/8	31 1/8	77 3/4	247	265	6.2	115/60/1	1/2	R290	3	1	Freezer
FTM-49FS-HC	43.7	40.8	54 3/4	31 1/8	77 3/4	355	392	7.0	115/60/1	3/4	R290	6	2	Freezer
FTM-72FS-HC	67.5	63	82 1/4	31 1/8	77 3/4	485	551	8.5	115/60/1	3/4	R290	9	3	Freezer

* Heights do not include 4" casters.

PLAN VIEWS

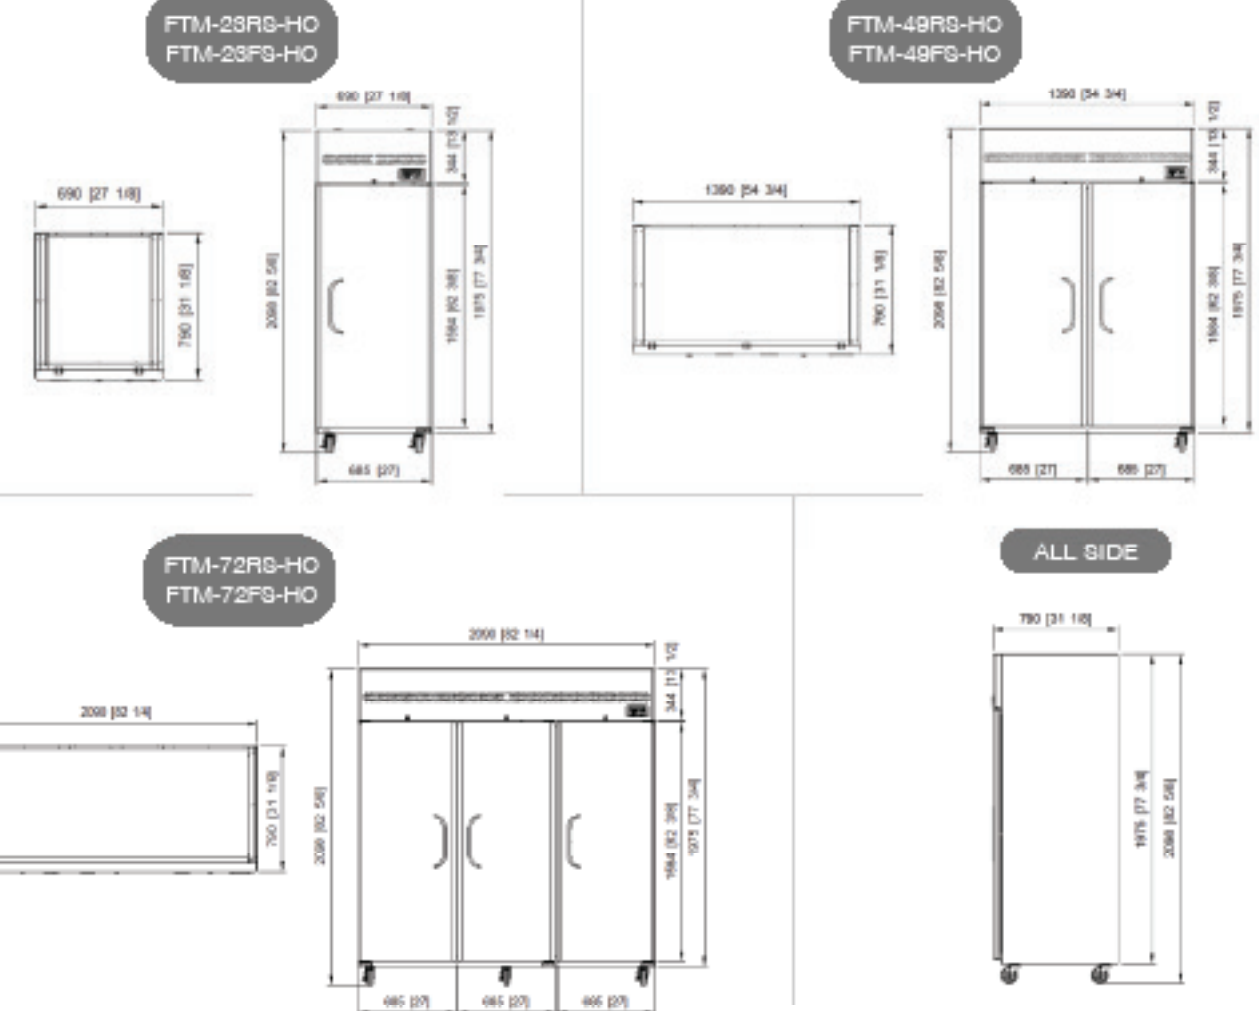



FOOD PREP TABLE

- **Salad & Sandwich Prep Table Door**
- **Salad & Sandwich Prep Table Drawer**
- **Megatop Sandwich Prep Table Door**
- **Megatop Sandwich Prep Table Drawer**
- **Pizza Prep Table - Door**
- **Pizza Prep Table - Drawer**

Salad & Sandwich Prep Table - Door

FEATURES & BENEFITS



FSU-28-HC



FSU-36-HC



FSU-48-HC



FSU-60-HC



FSU-72-HC

Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors
Galvanized steel finished back and bottom

Insulation PE Coated Sturdy Wire Shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

Practical and Heavy Duty Covers

Insulated stainless steel covers eliminate heat transfer and protect products when closed
Insulated pan cover keeps pans colder to lock in freshness - minimizes condensation

Practical Cutting Board

Deep (9 1/2") and reversible cutting board is easily removed for cleaning or additional use

User Friendly Door

Auto-closing doors
Magnetic door gasket provides easy to remove for cleaning or replacement
Sturdy and easy grip handles and Doors that open effortlessly

Automatic Evaporation & Defrost System

Additional Row of Pans (6"deep) Provides Greater Capacity
(Pans are optional)

Locking Divider Bars to Secure Pans

5" Heavy Duty Casters with Brakes Standard

Enhanced Airflow hold Product Temperature 32°F-41°F

SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimension (mm)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrig- erant	No. Shelves	No. Doors	No. Pans (1/6")
		W	D	H									
FSU-28-HC	6.55	27 1/2"	30"	42 1/2"	157	165	3.5	115/60/1	3/8	R290	1	1	8
FSU-36-HC	8.92	36 3/8"	30"	42 1/2"	190	208	3.5	115/60/1	3/8	R290	2	2	10
FSU-48-HC	12.23	48 1/4"	30"	42 1/2"	234	251	3.5	115/60/1	3/8	R290	2	2	12
FSU-60-HC	15.56	60 3/8"	30"	42 1/2"	256	278	3.5	115/60/1	3/8	R290	2	2	16
FSU-72-HC	18.75	72 3/8"	30"	42 1/2"	298	326	3.5	115/60/1	3/8	R290	3	3	18


* Heights include 5" casters

PLAN VIEWS


FSU-28-HO




FSU-36-HO

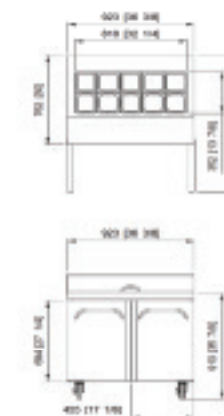


FSU-48-HO

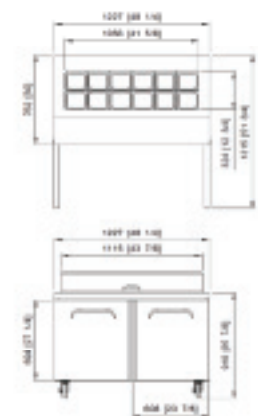


FSU-60-HO

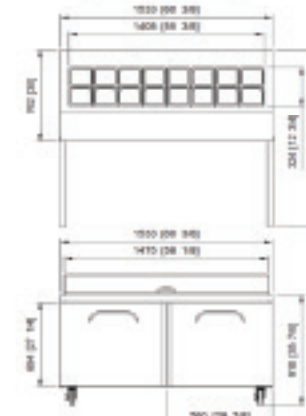

FSU-72-HO

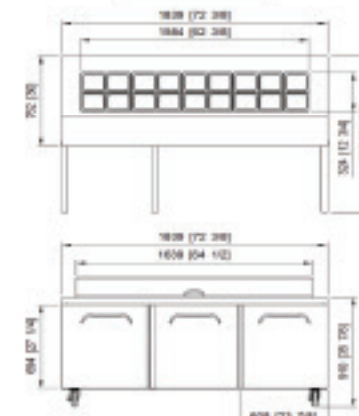

ALL SIDE



Salad & Sandwich Prep Table - Drawer

FEATURES & BENEFITS

SPECIFICATIONS



Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

Practical and Heavy Duty Covers

Insulated stainless steel covers eliminate heat transfer and protect products when closed
Insulated pan cover keeps pans colder to lock in freshness - minimizes condensation

Practical Cutting Board

Deep (9 1/2") and reversible cutting board is easily removed for cleaning or additional use

User Friendly Drawer

Full-pan-mountable size drawer provides convenience in using
Sturdy and easy grip handles that open effortlessly

Automatic Evaporation & Defrost System

6" deep Pans Provides Greater Capacity

Pans are optional

Locking Divider Bars Secure Pans

5" Heavy Duty Casters with Brakes Standard

Enhanced Airflow hold Product Temperature 32°F-41°F

Drawer Only or Door Mixed Models Available


Door/Drawer combination models require customer to designate door/drawer orientation

Model	Capacity (cu.ft)	Exterior Dimension (inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Drawer	No. Pans (1/6")
		W	D	H								
FSU-28-D2-HC	6.55	27 1/8	30	42 1/2	187	196	3.5	115/60/1	3/4	R290	2	8
FSU-36-D4-HC	8.92	36 3/8	30	42 1/2	238	251	3.5	115/60/1	3/4	R290	4	10
FSU-48-D4-HC	12.23	48 1/4	30	42 1/2	291	309	3.5	115/60/1	3/4	R290	4	12
FSU-60-D4-HC	15.56	60 3/8	30	42 1/2	322	344	3.5	115/60/1	3/4	R290	4	16
FSU-72-D6-HC	18.75	72 3/8	30	42 1/2	386	414	3.5	115/60/1	3/4	R290	6	18


* Heights include 5" casters

PLAN VIEWS

FSU-28-D2-HO

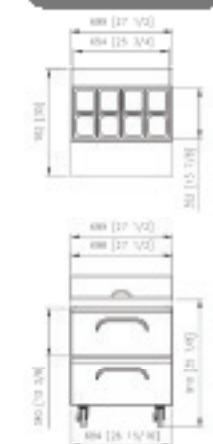

FSU-36-D4-HO

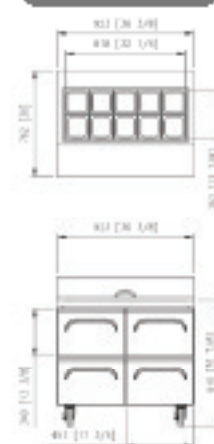

FSU-48-D4-HO




FSU-60-D4-HO



FSU-72-D6-HO



ALL SIDE

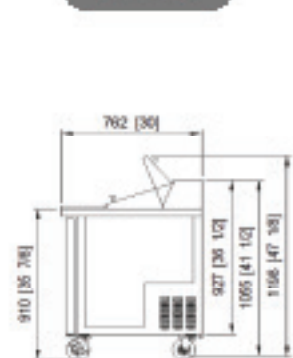

Megatop Sandwich Prep Table - Door

FEATURES & BENEFITS



Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors

Insulation PE coated sturdy wire shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

Practical and Heavy Duty Covers

Insulated stainless steel covers eliminate heat transfer and protect products when closed
Insulated pan cover keeps pans colder to lock in freshness - minimizes condensation

Practical Cutting Board

Deep (9 1/2") and reversible cutting board is easily removed for cleaning or additional use

User Friendly Door

Auto-closing doors
Magnetic door gasket provides easy to remove for cleaning or replacement
Sturdy and easy grip handles and Doors that open effortlessly

Automatic Evaporation & Defrost System

Additional Row of Pans(6"deep) Provides Greater Capacity

Pans are optional

Locking Divider Bars Secure Pans

5" Heavy Duty Casters with Brakes Standard

Enhanced Airflow hold Product Temperature 32°F-41°F


SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimensions (inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrig-erant	No. Shelves	No. Doors	No. Pans (1/6")
		W	D	H									
FMU-28-HC	6.35	27 1/2	35 1/4	41 1/8	165	176	3.5	115/60/1	3/8	R290	1	1	12
FMU-36-HC	8.92	36 3/8	35 1/4	41 1/8	203	216	3.5	115/60/1	3/8	R290	2	2	15
FMU-48-HC	12.23	48 1/4	35 1/4	41 1/8	247	265	3.5	115/60/1	3/8	R290	2	2	18
FMU-60-HC	15.56	60 3/8	35 1/4	41 1/8	278	300	3.5	115/60/1	3/8	R290	2	2	24
FMU-72-HC	18.75	72 3/8	35 1/4	41 1/8	324	353	3.5	115/60/1	3/8	R290	3	3	30


* Heights include 5" castor

PLAN VIEWS

FMU-28-HO



FMU-36-HO



FMU-48-HO




FMU-60-HO



FMU-72-HO



ALL SIDE

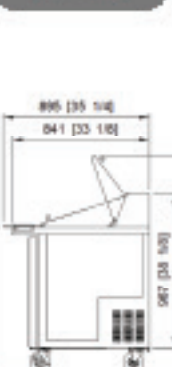

Megatop Sandwich Prep Table - Drawer

FEATURES & BENEFITS



Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

Practical and Heavy Duty Covers

Insulated stainless steel covers eliminate heat transfer and protect products when closed
Insulated pan cover keeps pans colder to lock in freshness - minimizes condensation

Practical Cutting Board

Deep (9 1/2") and reversible cutting board is easily removed for cleaning or additional use

User Friendly Drawer

Full-pan-mountable size drawer provides convenience in using
Sturdy and easy grip handles that open effortlessly

Automatic Evaporation & Defrost System

Additional Row of Pans (6" deep) Provides Greater Capacity

Pans are optional

Locking Dividing Bars Secure Pans

5" Heavy Duty Casters with Brakes Standard

Enhanced Airflow hold Product Temperature 32°F-41°F

Drawer Only or Door Mixed Models Available

Door/Drawer combination models require customer to designate door/drawer orientation


SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimension (inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/1-2/3)	HP	Refrigerant	No. Drawer	No. Pans (1/4")
		W	D	H								
FMU-28-D2-HC	6.55	27 1/8	35 1/4	44 1/8	198	207	3.5	115/60/1	3/8	R290	2	12
FMU-36-D4-HC	8.52	36 3/8	35 1/4	44 1/8	251	265	3.5	115/60/1	3/8	R290	4	15
FMU-48-D4-HC	12.23	48 1/4	35 1/4	44 1/8	304	322	3.5	115/60/1	3/8	R290	4	18
FMU-60-D4-HC	15.56	60 3/8	35 1/4	44 1/8	344	365	3.5	115/60/1	3/8	R290	4	24
FMU-72-D6-HC	18.75	72 3/8	35 1/4	44 1/8	412	441	3.5	115/60/1	3/8	R290	6	30

* Heights include 5" for castor

* Drawers : D2,D4,D6 → All Drawers, Number → Number of Drawers, LAMRFBMFLALM → Drawer Location

PLAN VIEWS

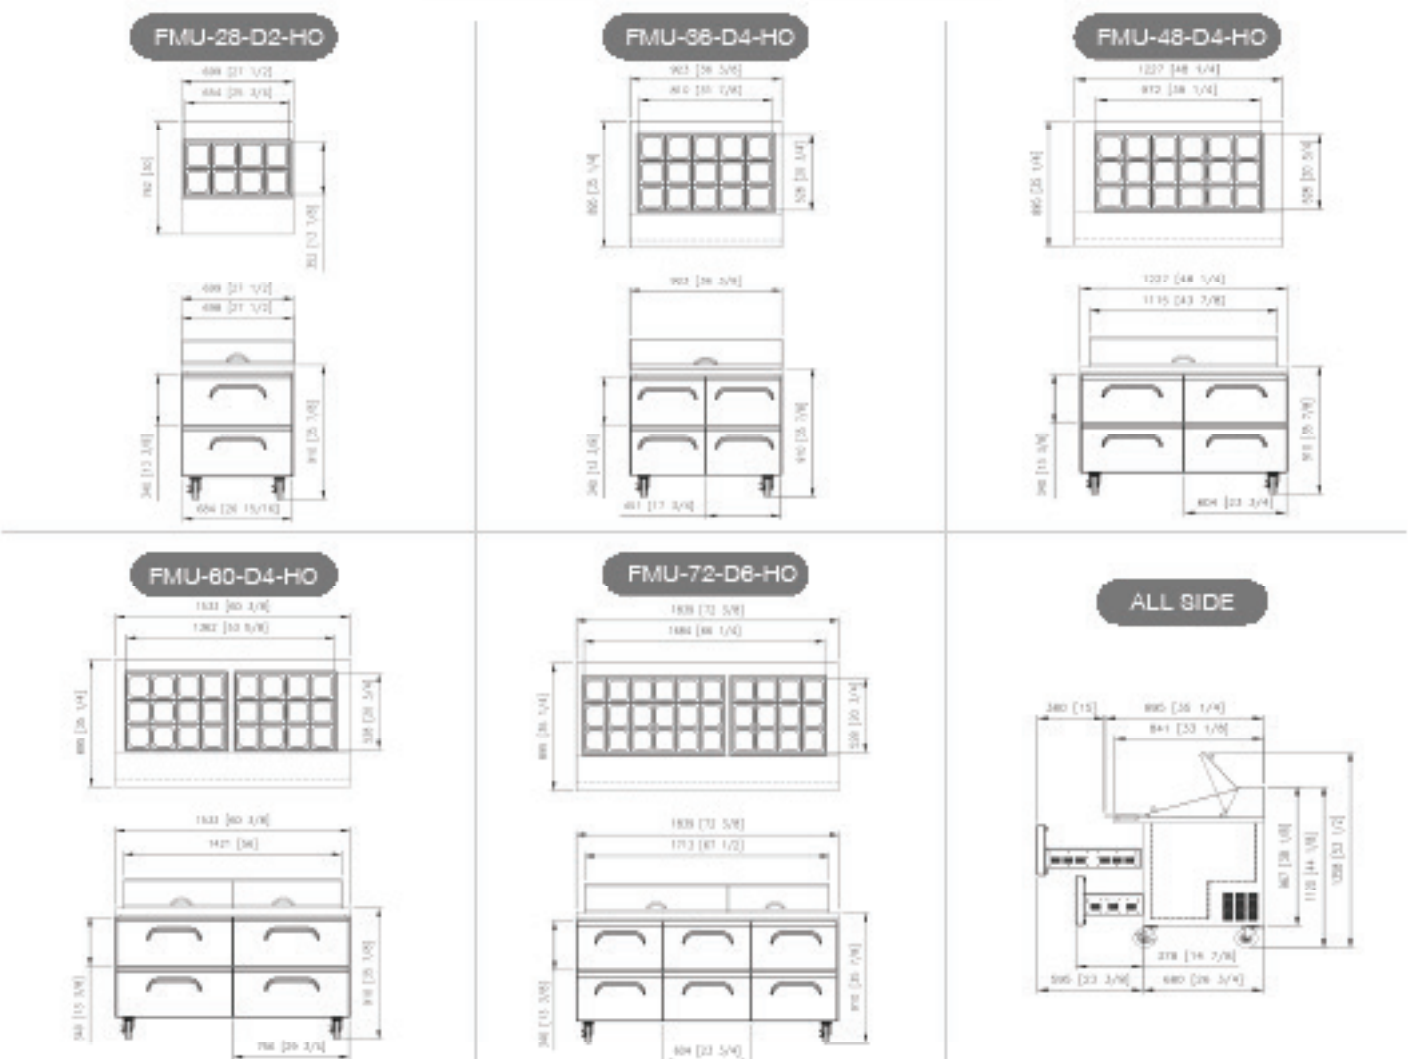

Pizza Prep Table - Door

FEATURES & BENEFITS



FPT-44-HC



FPT-67-HC



FPT-93-HC

Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors
Galvanized steel finished back and bottom

Insulation PE coated sturdy wire shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

Practical and Heavy Duty Covers

Insulated stainless steel covers eliminate heat transfer and protect products when closed
Insulated pan cover keeps pans colder to lock in freshness - minimizes condensation

Practical Cutting Board

Extra Deep (18 7/8") and reversible cutting board is easily removed for cleaning or additional use

User Friendly Door

Auto-closing doors
Magnetic door gasket provides easy to remove for cleaning or replacement
Sturdy and easy grip handles and doors that open effortlessly

Automatic Evaporation & Defrost System

Additional Row of Pans (6" deep) Provides Greater Capacity

*Pans are optional

Locking Dividing Bars Secure Pans

4" Heavy Duty Casters with Brakes Standard

Enhanced Airflow hold Product Temperature 32°F-41°F



SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimension (Inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Shelves	No. Doors	No. Pans (1/3")
		W	D	H									
FPT-44-HC	11.3	44 5/8	36 1/2	42	287	304	3.5	115/60/1	3/8	R290	2	1	6
FPT-67-HC	20.2	67	36 1/2	42	368	397	3.5	115/60/1	3/8	R290	4	2	9
FPT-93-HC	30.8	93 1/4	36 1/2	42	452	492	3.5	115/60/1	3/8	R290	6	3	12



* Heights include 4" casters.

PLAN VIEWS



FPT-44-HO




FPT-67-HO



FPT-93-HO

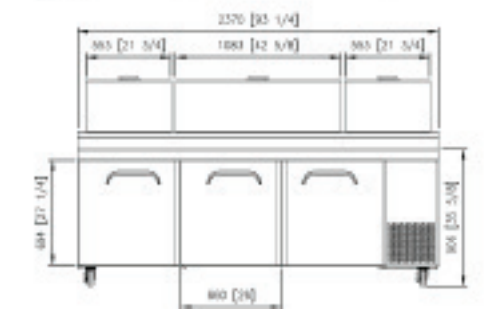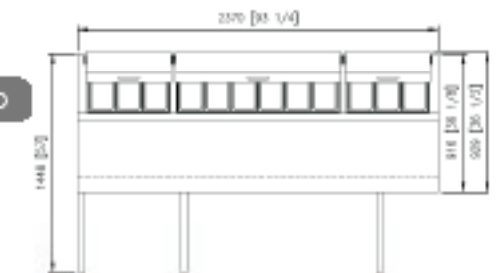

ALL SIDE



Pizza Prep Table - Drawer

FEATURES & BENEFITS



FPT-44-D2-HC



FPT-67-D2-HC



FPT-67-D4-HC



FPT-93-D4-HC



FPT-93-D6-HC

Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors
Galvanized steel finished back and bottom

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

Practical and Heavy Duty Covers

Insulated stainless steel covers eliminate heat transfer and protect products when closed
Insulated pan cover keeps pans colder to lock in freshness - minimizes condensation

Practical Cutting Board

Extra Deep (18 7/8") and reversible cutting board is easily removed for cleaning or additional use

User Friendly Drawer

Easy-to-use drawer type
Sturdy and easy grip handles and drawers that open effortlessly

Automatic Evaporation & Defrost System

Additional Row of Pans (6" deep) Provides Greater Capacity

*Pans are optional

Locking Dividing Bars Secure Pans

4" Heavy Duty Castors with Brakes Standard

Enhanced Airflow hold Product Temperature 32°F-41°F

Drawer Only or Door Mixed Models Available

Door/Drawer combination models require customer to designate door/drawer orientation

SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimension (Inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ø)	HP	Refrig- erant	No. Drawers	No. Fans (1/3")
		W	D	H								
FPT-44-D2-HC	11.3	44 3/8	35 1/2	42	320	337	3.5	115/60/1	3/8	R290	2	6
FPT-67-D4-HC	20.2	67	35 1/2	42	423	452	3.5	115/60/1	3/8	R290	4	9
FPT-93-D6-HC	30.8	93 1/4	35 1/2	42	545	584	3.5	115/60/1	3/8	R290	6	12

* Heights include 4" castor



* Drawers : D2,D4,D6 → All Drawer, Number → Number of Drawers, L/R/R/R/R/L/L/L → Drawer Location

PLAN VIEWS



FPT-44-D2-HC




FPT-67-D4-HC

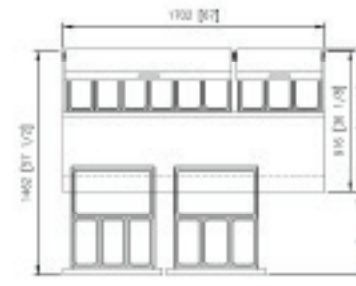

FPT-93-D6-HC

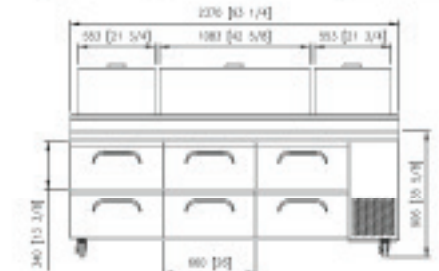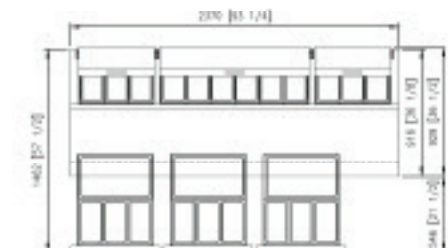

ALL SIDE





UNDER COUNTER & WORKTOP

- **Under Counter Refrigerator & Freezer**
- **Under Counter Refrigerator Drawer**
- **Worktop Refrigerator Door**
- **Worktop Refrigerator Drawer**



Under Counter Refrigerator & Freezer

FEATURES & BENEFITS



FUR-28-HC
FEF-28-HC



FUR-36-HC
FEF-36-HC



FUR-48-HC
FEF-48-HC



FUR-60-HC
FEF-60-HC



FUR-72-HC

Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors
Galvanized steel finished back and bottom

Insulation PE coated sturdy wire shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Door

Auto-closing doors
Magnetic door gasket provides easy to remove for cleaning or replacement
Sturdy and easy grip handles and Doors that open effortlessly

Automatic Evaporation & Defrost System

5" Heavy Duty Casters with Brakes Standard

Refrigerator Holds Product Temperature 32°F--41°F

Freezer Holds Product Temperature Below 0°F

SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimension (Inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Shelves	No. Doors	Remarks
		W	D	H									
FUR-28-HC	6.55	27 1/2	30	35 7/8	134	413	3.5	115/60/1	3/8	R290	1	1	Refrigerator
FUR-36-HC	8.92	36 3/8	30	35 7/8	170	181	3.5	115/60/1	3/8	R290	2	2	Refrigerator
FUR-48-HC	12.23	48 1/4	30	35 7/8	209	227	3.5	115/60/1	3/8	R290	2	2	Refrigerator
FUR-60-HC	15.56	60 3/8	30	35 7/8	231	254	3.5	115/60/1	3/8	R290	2	2	Refrigerator
FUR-72-HC	18.75	72 3/8	30	35 7/8	267	295	3.5	115/60/1	3/8	R290	3	3	Refrigerator
FEF-28-HC	5.9	27 1/2	30	35 7/8	143	152	3.5	115/60/1	3/8	R290	1	1	Freezer
FEF-36-HC	8.08	36 3/8	30	35 7/8	181	192	7.5	115/60/1	1/2	R290	2	2	Freezer
FEF-48-HC	11.18	48 1/4	30	35 7/8	220	238	7.5	115/60/1	1/2	R290	2	2	Freezer
FEF-60-HC	14.28	60 3/8	30	35 7/8	254	276	7.5	115/60/1	1/2	R290	2	2	Freezer

* Heights include 5" casters

PLAN VIEWS

FUR-28-HO
FEF-28-HO



FUR-36-HO
FEF-36-HO




FUR-60-HO
FEF-60-HO




FUR-36-HO
FEF-36-HO




FUR-72

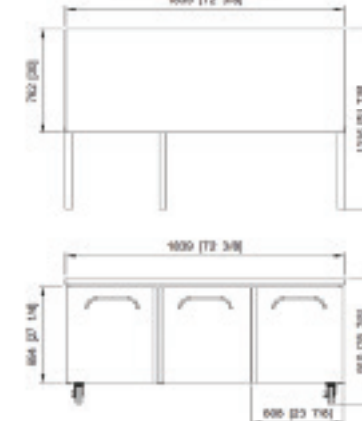

FUR-48-HO
FEF-48-HO

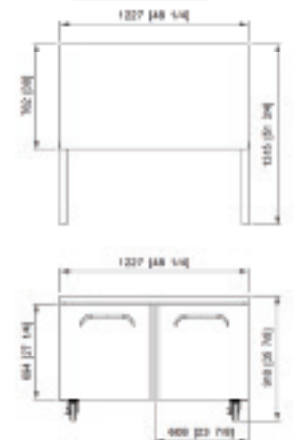

ALL SIDE



Under Counter Refrigerator - Drawer

FEATURES & BENEFITS



FUR-28-D2-HC



FUR-36-D4-HC



FUR-48-D2-HC



FUR-60-D2-HC



FUR-72-D4-HC

Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors
Galvanized steel finished back and bottom

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Drawer

Full-pan-mountable size drawer provides convenience in using
Sturdy and easy grip handles that open effortlessly

Automatic Evaporation & Defrost System

5" Heavy Duty Casters with Brakes Standard

Accomodate 6" Deep Pans Provide Greater Capacity

Pans are optional

Enhanced Airflow hold Product Temperature 32°F-41°F

Drawer Only or Door Mixed Models Available

Door/Drawer combination models require customer to designate door/drawer orientation

SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimension (inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrig- erant	No. Doors
		W	D	H							
FUR-28-D2-HC	6.55	27 1/2	30	35 7/8	165	174	3.5	115/60/1	3/8	R290	2
FUR-36-D4-HC	8.92	36 3/8	30	35 7/8	218	229	3.5	115/60/1	3/8	R290	4
FUR-48-D4-HC	12.23	48 1/4	30	35 7/8	267	284	3.5	115/60/1	3/8	R290	4
FUR-60-D4-HC	15.56	60 3/8	30	35 7/8	298	320	3.5	115/60/1	3/8	R290	4
FUR-72-D6-HC	18.75	72 3/8	30	35 7/8	355	384	3.5	115/60/1	3/8	R290	6

* Heights include 5" casters

* Drawers : D2,D4,D6 → All Drawer, Number → Number of Drawers, LAMRFBMRLM → Drawer Location

PLAN VIEWS


FUR-28-D2-HC



FUR-36-D4-HC




FUR-48-D4-HC

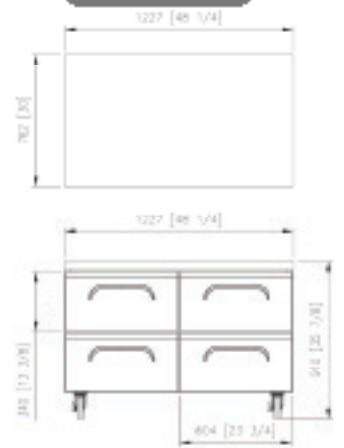


FUR-60-D4-HC



FUR-72-D6-HC

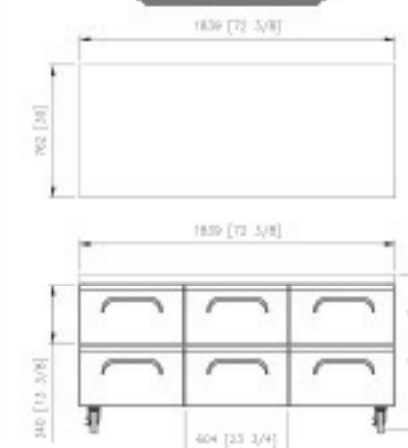

ALL SIDE

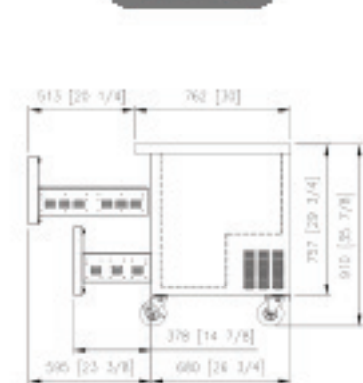

FEATURES & BENEFITS

SPECIFICATIONS



FWR-28-HC



FWR-36-HC



FWR-48-HC



FWR-60-HC



FWR-72-HC

Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors
Galvanized steel finished back and bottom
18 gauge (1.0mm) thick stainless steel worktop

Insulation PE coated sturdy wire shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Door

Auto-closing doors
Magnetic door gasket provides easy to remove for cleaning or replacement
Sturdy and easy grip handles and Doors that open effortlessly

Automatic Evaporation & Defrost System

5" Heavy Duty Casters with Brakes Standard

Enhanced Airflow hold Product Temperature 32°F-41°F

Model	Capacity (cu.ft)	Exterior Dimension (inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Shelves	No. Doors
		W	D	H								
FWR-28-HC	6.55	27 1/2	30	35 3/4	141	150	3.5	115/60/1	3/8	R290	2	1
FWR-36-HC	8.52	36 3/8	30	35 3/4	175	190	3.5	115/60/1	3/8	R290	4	2
FWR-48-HC	12.23	48 1/4	30	35 3/4	220	238	3.5	115/60/1	3/8	R290	4	2
FWR-60-HC	15.56	60 3/8	30	35 3/4	245	267	3.5	115/60/1	3/8	R290	4	2
FWR-72-HC	18.75	72 3/8	30	35 3/4	282	311	3.5	115/60/1	3/8	R290	6	3


* Heights include 5" casters

PLAN VIEWS


FWR-28-HO




FWR-36-HO





FWR-48-HO




FWR-60-HO



FWR-72-HO

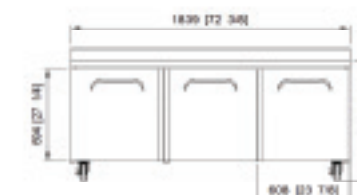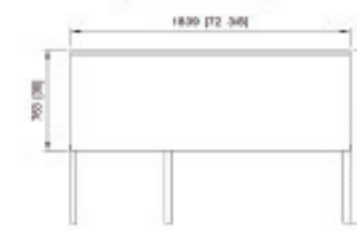

ALL SIDE

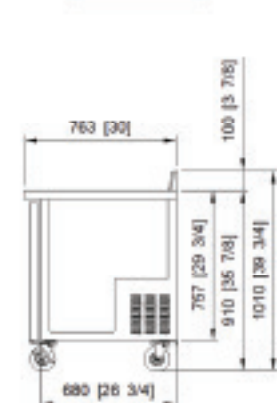

Worktop Refrigerator - Drawer

FEATURES & BENEFITS



FWR-28-D2



FWR-36-D4



FWR-48-D2



FWR-60-D4



FWR-72-D4

Strong & Durable Cabinet Finish

Stainless steel finished top, front, sides and doors
Galvanized steel finished back and bottom
18 gauge(1.0mm) thick stainless steel worktop

Insulation PE coated sturdy wire shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Drawer

Sturdy and easy grip handle opens effortlessly

Automatic Evaporation & Defrost System

5" Heavy Duty Casters with Brakes Standard

Enhanced Airflow hold Product Temperature 32°F-41°F (0°C-5°C)

Accomodate 6" Deep Pans Provide Greater Capacity (Pans are Optional)

Drawer Only or Door Mixed Models Available

Door/Drawer combination models require customer to designate door/drawer orientation

SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimension (Inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Doors
		W	D	H							
FWR-28-D2-HC	6.55	27 1/2	30	35 3/4	172	181	3.5	115/60/1	3/8	R290	2
FWR-36-D4-HC	8.52	36 3/8	30	35 3/4	227	238	3.5	115/60/1	3/8	R290	4
FWR-48-D4-HC	12.23	48 1/4	30	35 3/4	276	293	3.5	115/60/1	3/8	R290	4
FWR-60-D4-HC	15.56	60 3/8	30	35 3/4	311	338	3.5	115/60/1	3/8	R290	4
FWR-72-D6-HC	18.75	72 3/8	30	35 3/4	370	399	3.5	115/60/1	3/8	R290	6

* Heights include 5"caster

* Drawers : D2,D4,D6 → All Drawers, Number → Number of Drawers, L/M/RB/RM/L/M → Drawer Location

PLAN VIEWS


FWR-28-D2-HO




FWR-36-D4-HO




FWR-48-D4-HO

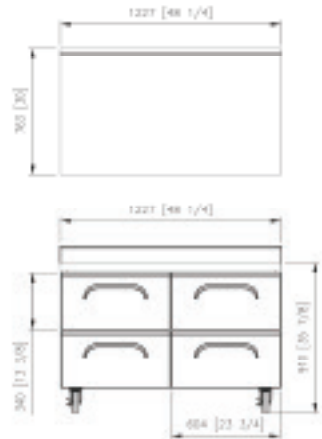


FWR-60-D4-HO

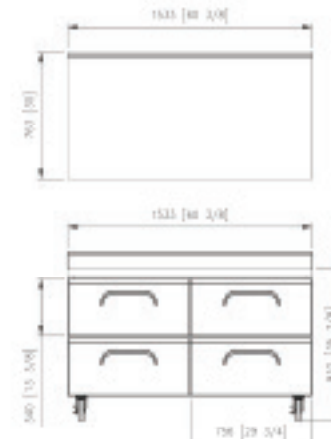

FWR-72-D6-HO

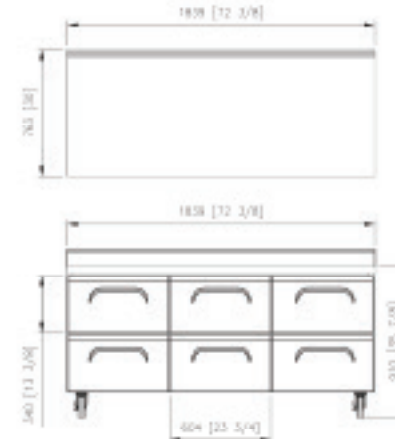

ALL SIDE

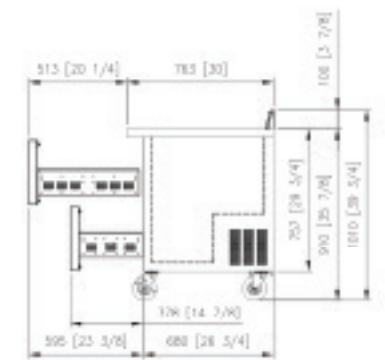



CHEF BASE

- **Chef Base**



FEATURES & BENEFITS



FCB-36-HC



FCB-48-HC



FCB-53-HC



FCB-60-HC



FCB-72-HC



FCB-84-HC



FCB-96-HC

Strong & Durable Cabinet Finish

Stainless steel finished top, front, and sides

Galvanized steel finished back and bottom

One-piece heavy duty 16 gauge (1.2mm) reinforced stainless steel top

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly and Heavy Duty Drawers

Telescoping drawer slides with roller bearing wheels

Sturdy and easy grip handles and Doors that open effortlessly

Automatic Evaporation & Defrost System

4" Heavy Duty Casters with Brakes Standard (Legs available)

Accomodate 4" Deep Pans Provide Additional Capacity

*Pans are optional

Exterior Features

Digital thermometer monitors interior temperature

Elegant rounded corner for safety and aesthetic benefits

Enhanced Airflow Hold Product Temperature 32°F~41°F


Marine Edge or Flat Top Option Available

SPECIFICATIONS

Model	Capacity (cu.ft)	Interior Dimension (mm)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Doors	No. Pans (1/1")
		W	D	H								
FCB-36-HC	5.7	36	31	25 1/2	170	181	3.0	115/60/1	1/4	R-290	2	2 + 4 (1/1")
FCB-48-HC	8.6	48	31	25 1/2	207	220	3.0	115/60/1	1/4	R-290	2	4 + 4 (1/1")
FCB-53-HC	9.8	53	31	25 1/2	220	243	3.0	115/60/1	1/4	R-290	2	6
FCB-60-HC	9.8	60	31	25 1/2	231	254	3.0	115/60/1	1/4	R-290	2	6
FCB-72-HC	14.3	72	31	25 1/2	276	302	3.0	115/60/1	1/4	R-290	4	6
FCB-74-HC	14.3	74 1/2	31	25 1/2	282	309	3.0	115/60/1	1/4	R-290	4	6
FCB-84-HC	17.2	84	31	25 1/2	311	342	3.5	115/60/1	3/8	R-290	4	6
FCB-86-HC	17.2	86 1/2	31	25 1/2	317	348	3.5	115/60/1	3/8	R-290	4	6
FCB-96-HC	21.4	96 1/2	31	25 1/2	342	377	3.5	115/60/1	3/8	R-290	4	12
FCB-99-HC	21.4	99	31	25 1/2	346	384	3.5	115/60/1	3/8	R-290	4	12

* Heights include 4" casters - marine edge standard

PLAN VIEWS

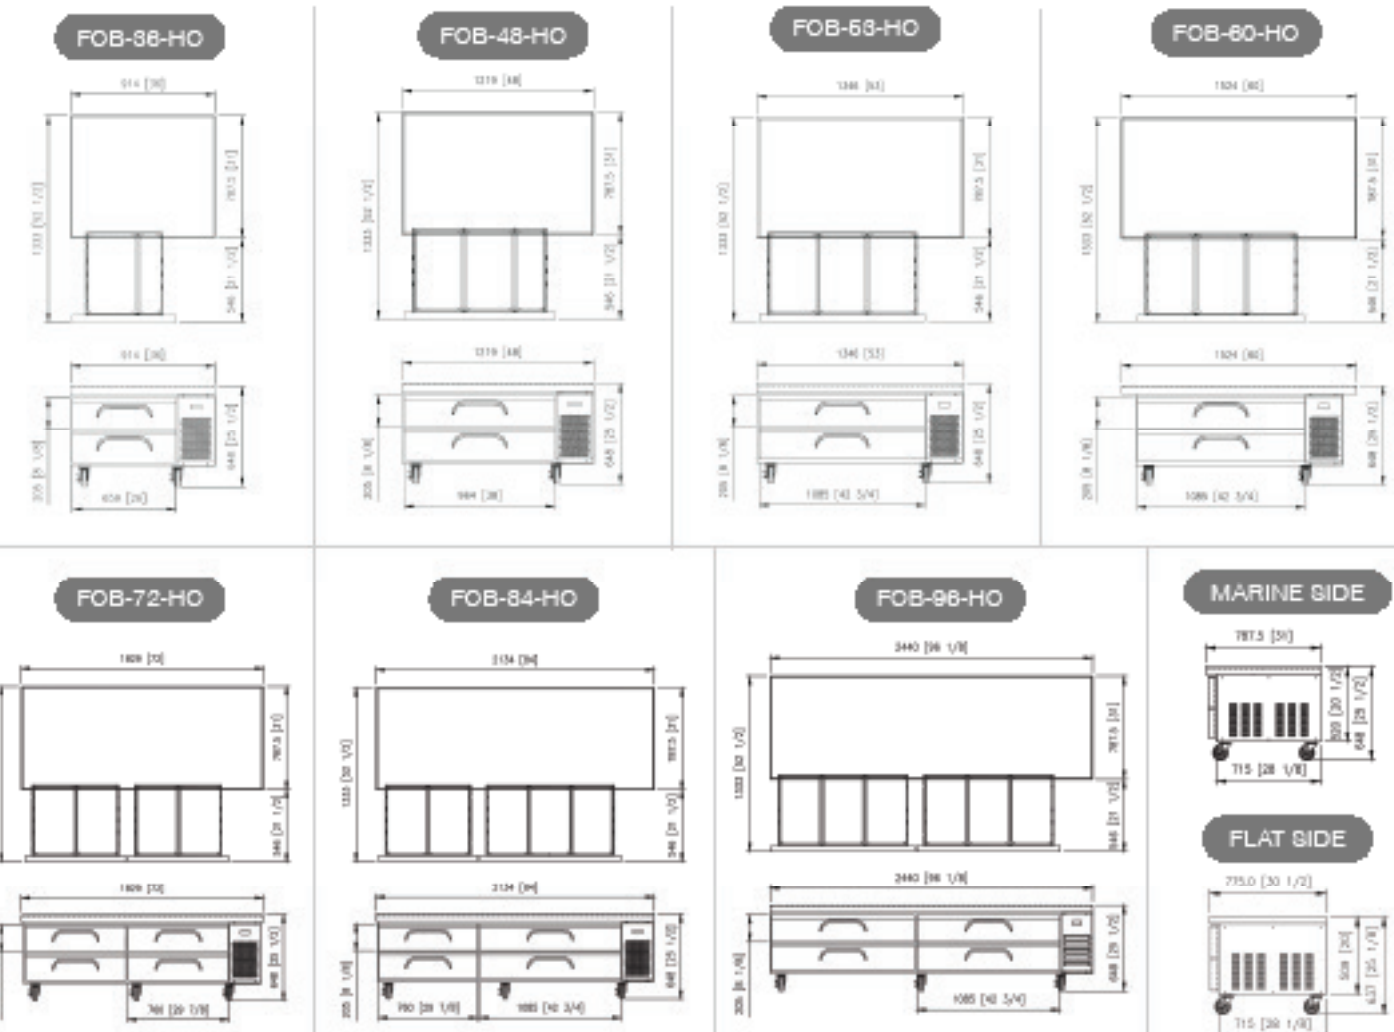



UNDER BAR EQUIPMENT

- **Direct Draw Beer Dispenser**
- **Bottle Cooler**
- **Back Bars - Solid Door**
- **Back Bars - Glass Door**
- **Narrow Depth Back Bar - Solid Door**
- **Narrow Depth Back Bar - Glass Door**



Direct Draw Beer Dispenser

FEATURES & BENEFITS



Strong & Durable Cabinet Finish

Heavy duty stainless steel finished top
Stainless or galvanized interior available

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Door

Magnetic door gasket provides easy to remove for cleaning or replacement
Sturdy and easy grip handles and doors that open effortlessly
Door locks standard

Insulated Dispensing Towers

3" diameter stainless steel insulated beer tower (*Towers are optional)

User Friendly Features

Cabinet design to accommodate for all types of beer kegs
Automatic evaporation & defrost system

4" Heavy Duty Casters with Brakes for 1 Door Unit (Options for Other Models)

Available with 3 or 4 or 5" diameter castors

LED Lighting Interior Display System

Bright and clear interior LED for excellent visibility

Enhanced Airflow Hold Product Temperature 32°F-41°F

Model Options

M1: Magnificent black laminated exterior and galvanized steel interior (Standard)
M2: Clean and simple looking stainless exterior and interior
M3: Glass door model available


SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimension (inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Doors	No. Towers
		W	D	H								
FBD-23B-HC	7.5	23 3/8	31 1/8	35 1/8	126	132	3.0	115/60/1	1/4	R290	1	1
FBD-59B-HC	19.4	59	27 1/8	37	216	236	3.5	115/60/1	3/8	R290	2	2
FBD-69B-HC	23.4	69 1/8	27 1/8	37	240	265	3.5	115/60/1	3/8	R290	2	2
FBD-80B-HC	27.9	80 3/4	27 1/8	37	273	302	3.5	115/60/1	3/8	R290	3	2
FBD-90B-HC	31.6	90 3/8	27 1/8	37	298	331	3.5	115/60/1	3/8	R290	3	2
FBD-95B-HC	33.6	95 1/4	27 1/8	37	311	346	3.5	115/60/1	3/8	R290	3	2

* FBD-23B Height includes 4" castor

* Heights do not include castor and lower height - Casters are optional and towers are not provided

PLAN VIEWS

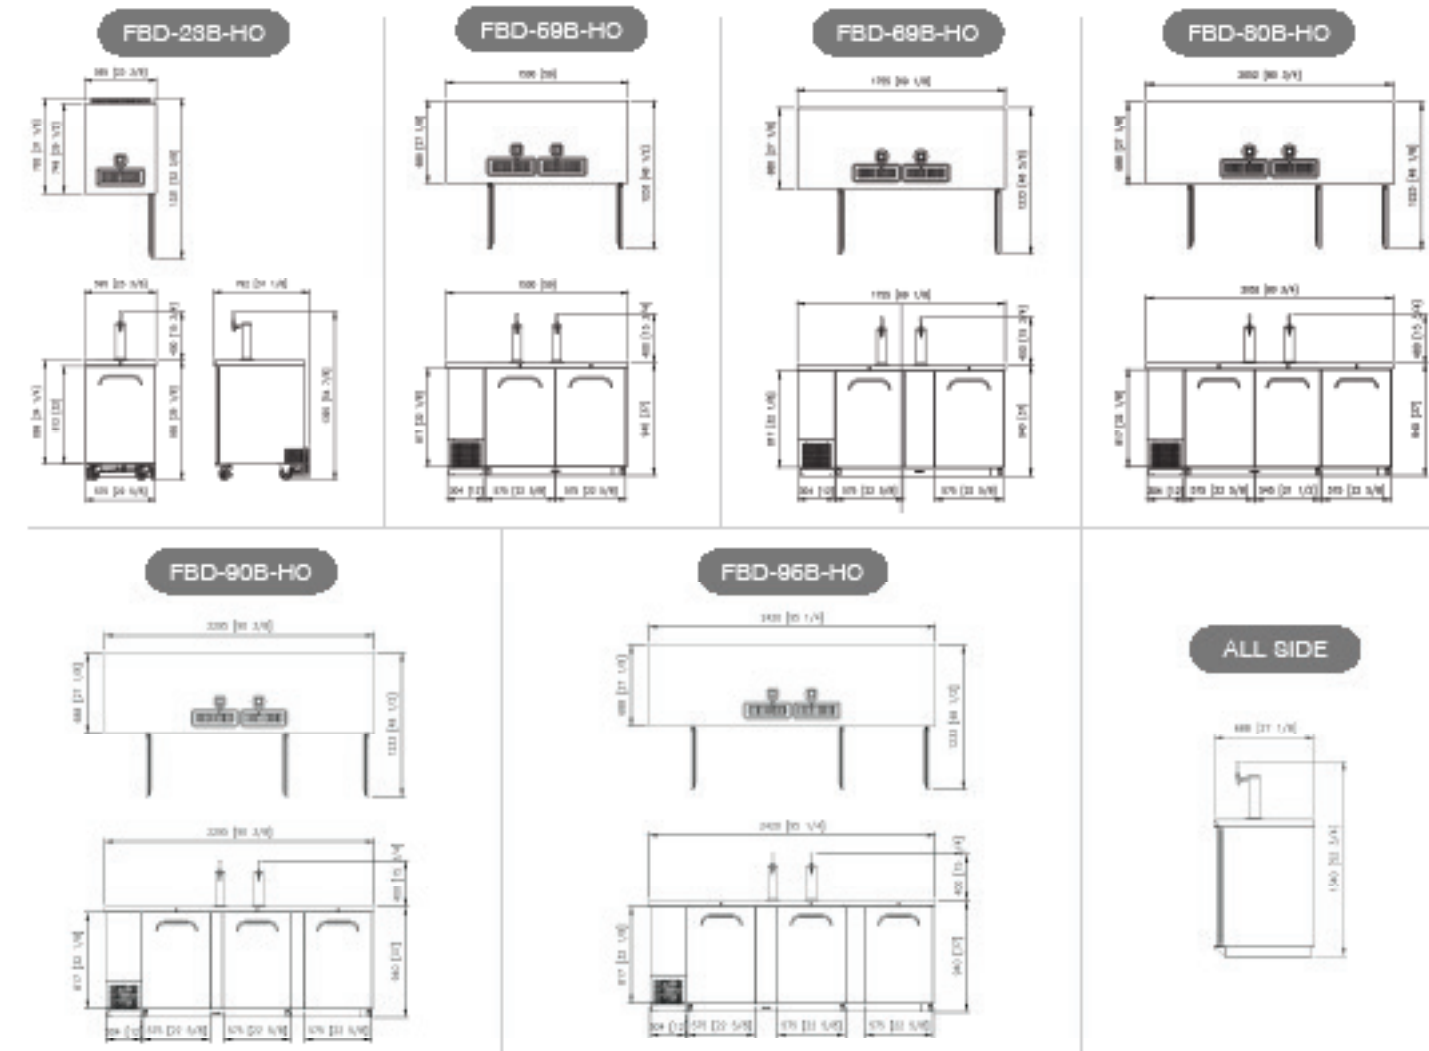

FEATURES & BENEFITS



FBC-36B-HC



FBC-50B-HC



FBC-65B-HC



FBC-BIB-HC



FBC-95B-HC

Strong & Durable Cabinet Finish

Black coated steel finished cabinet for exterior
One-piece stainless sliding lids
Stainless or galvanized interior available
PE coated adjustable dividers

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Features

Durable, removable bottle cap opener and catcher help quick opening beverages
Automatic evaporation & defrost system
Sturdy and easy grip handles and Doors that open effortlessly
Available with 3 or 4 or 5" diameter castors (Option for all models)

Accommodate Door Locks

Enhanced Airflow Hold Product Temperature 32°F-41°F

Model Options

M1: Magnificent black coated exterior and galvanized steel interior (standard)
M2: Clean and simple looking stainless exterior and interior

SPECIFICATIONS

Model	Capacity			Exterior Dimension (Inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/PS)	HP	Refrig- erant	No. Disposer	No. Draws
	cu.ft	Can	Bottle	W	D	H								
FBC-368-HC	9.9	519	229	36 3/4	28 1/2	33 3/8	128	141	3.8	115/60/1	1/4	R290	2	1
FBC-508-HC	14.8	857	377	50	28 1/2	33 3/8	196	214	3.5	115/60/1	3/8	R290	3	2
FBC-658-HC	20.1	1191	529	64 1/2	28 1/2	33 3/8	229	251	3.5	115/60/1	3/8	R290	3	2
FBC-808-HC	26	1525	715	80 1/2	28 1/2	33 3/8	273	296	3.5	115/60/1	3/8	R290	4	3
FBC-958-HC	31.3	1859	877	95	28 1/2	33 3/8	302	335	3.5	115/60/1	3/8	R290	5	3

*Heights do not include cockpit. Cockpits are optional.

12 oz Bottle

Height : 8.02" (204.9mm)
Bottom Diameter : 2.413" (61.3mm)



12 oz Can

Height: 4-1/2" (114.3mm)
Bottom Diameter: 2-3/8" (61.9mm)



PLAN VIEWS

FBO-36B-HO




FBO-60B-HO




FBO-85B-HO




FBO-808-HO

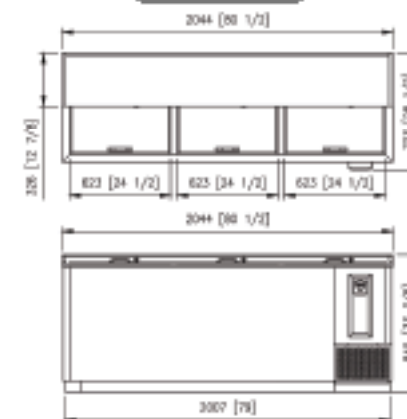

FBO-85B-HO

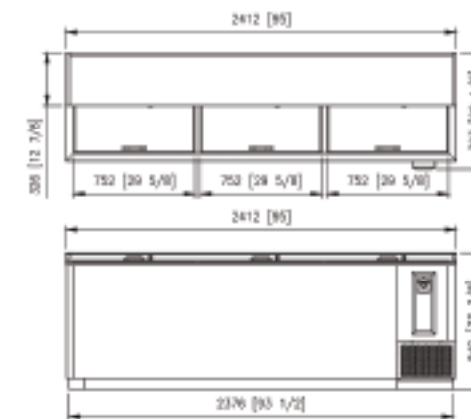

ALL SIDE



Back Bar - Solid Door

FEATURES & BENEFITS



Strong & Durable Cabinet Finish

Heavy duty stainless steel finished top
Stainless or galvanized interior available

Insulation PE Coated Sturdy Wire Shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Features

Cabinet design to accommodate for all types of cans and bottles
Automatic evaporation & defrost system
Sturdy and easy grip handles and doors that open effortlessly
Magnetic door gasket provides easy to remove for cleaning or replacement
Door locks standard

4" Heavy Duty Castors with Brakes for 1 Door Unit (Options for Other Models)

Available with 3", 4" or 5" diameter castors

Energy Saving LED Interior Lights with Switch

Bright and clear interior LED for excellent visibility

Enhanced Airflow Holds Product Temperature 32°F-41°F

Model Options

M1: Magnificent black coated exterior and galvanized steel interior
M2: Clean and simple looking stainless exterior and interior

SPECIFICATIONS

Model	Capacity			Exterior Dimension (inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrig. eqvt	No. Shelves	No. Doors
	cu.ft	Can	Bottle	W	D	H								
FBB-23B-HC	7.9	386	181	23 3/8	31 1/8	35 3/8	128	134	3.8	115/60/1	1/4	129B	2	1
FBB-59B-HC	19.4	1,084	498	53	27 1/8	37	220	240	3.5	115/60/1	3/8	129B	4	2
FBB-69B-HC	23.4	1,259	584	63 3/8	27 1/8	37	251	276	3.5	115/60/1	3/8	129B	4	2
FBB-80B-HC	27.9	1,566	714	68 3/4	27 1/8	37	282	315	3.5	115/60/1	3/8	129B	6	3
FBB-90B-HC	31.6	1,786	818	78 3/8	27 1/8	37	329	342	3.5	115/60/1	3/8	129B	6	3
FBB-95B-HC	33.6	1,875	858	85 3/4	27 1/8	37	324	359	3.5	115/60/1	3/8	129B	6	3

* FBB-23B-HC height includes 4" castor

* Heights do not include castor height - Castors are optional

12 oz Bottle

Height: 8.02" (205mm)
Bottom Diameter: 2.413" (61.3mm)




12 oz Can

Height: 4.12" (104.3mm)
Bottom Diameter: 2.54" (64.3mm)



PLAN VIEWS

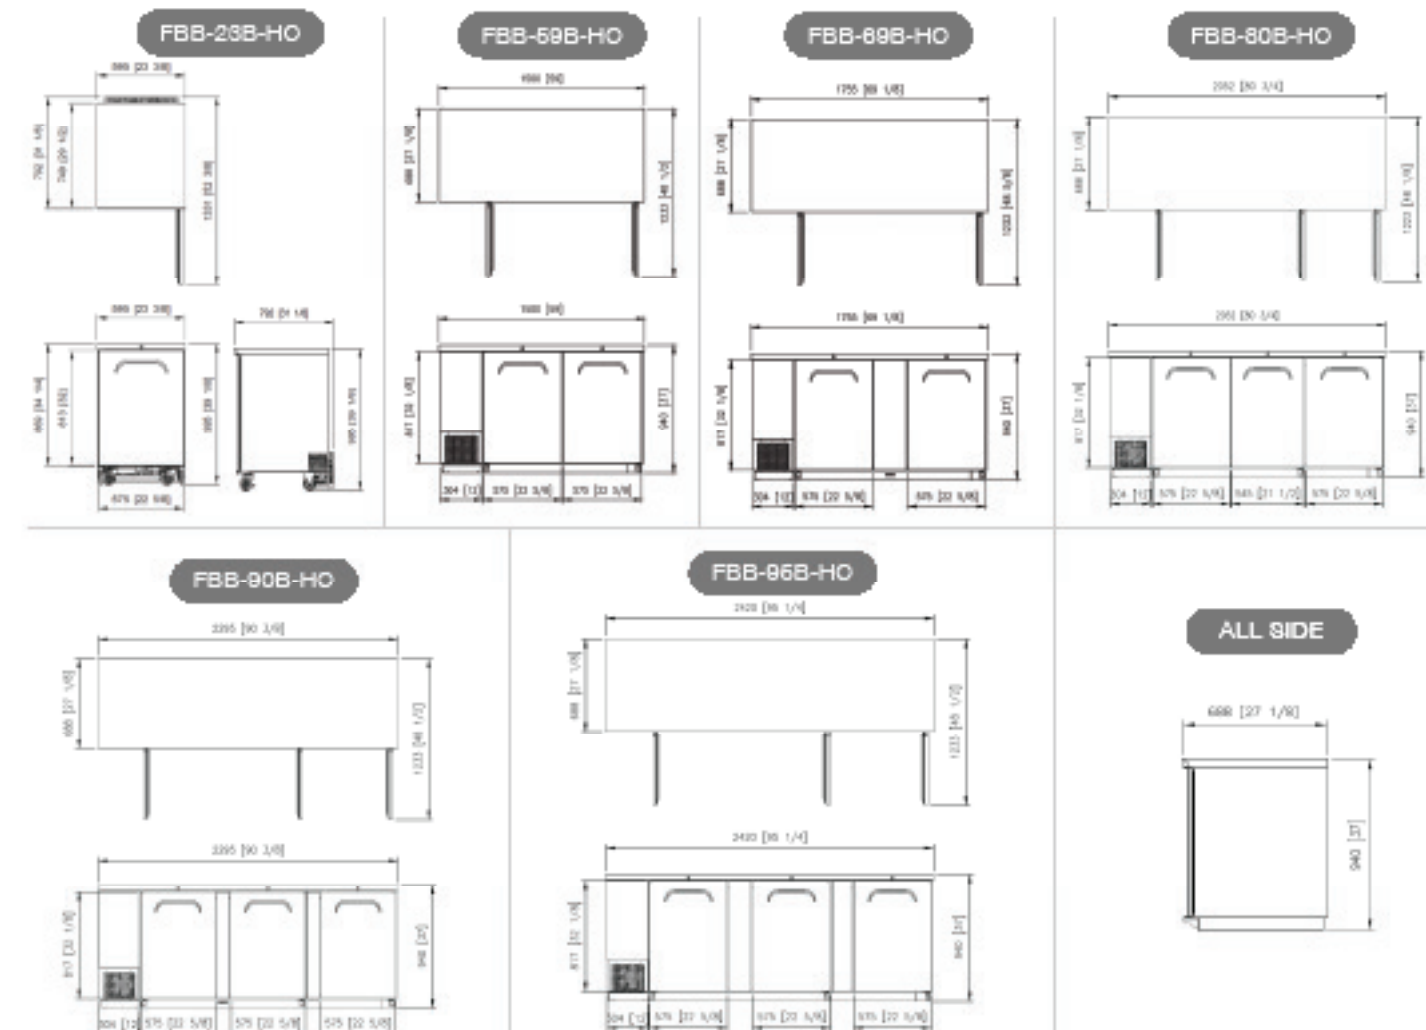

FEATURES & BENEFITS



FBB-59BG-HC



FBB-69BG-HC



FBB-80BG-HC



FBB-23BG-HC



FBB-90BG-HC



FBB-95BG-HC

Strong & Durable Cabinet Finish

Heavy duty stainless steel finished top
Stainless or galvanized interior available

Insulation PE coated sturdy wire shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Features

Cabinet design to accommodate for all types of cans and bottles

Automatic evaporation & defrost system

Sturdy and easy grip handles and doors that open effortlessly

Magnetic door gasket provides easy to remove for cleaning or replacement

Door locks standard

4" Heavy Duty Castors with Brakes for 1 Door Unit (Options for Other Models)

Available with 3", 4" or 5" diameter castors

Energy Saving LED Interior Lights with Switch

Transparent glass door for more excellent product display with bright and clear LED lights

Enhanced Airflow Hold Product Temperature 32°F~41°F

Model Options

M1: Magnificent black laminated exterior and galvanized steel interior

M2: Clean and simple looking stainless exterior and interior

SPECIFICATIONS

Model	Capacity			Exterior Dimension (Inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Shelves	No. Doors
	cu.ft	Can	Bottle	W	D	H								
FBB-23BG-HC	7.9	36	181	23 3/8	31 1/8	32 1/8	132	139	3.0	115/60/1	1/4	R290	2	1
FBB-59BG-HC	19.4	1,084	438	59	27 1/8	37	236	256	3.5	115/60/1	3/8	R290	4	2
FBB-69BG-HC	23.4	1,289	594	69 1/8	27 1/8	37	262	287	3.5	115/60/1	3/8	R290	4	2
FBB-80BG-HC	27.9	1,566	714	80 3/4	27 1/8	37	302	331	3.5	115/60/1	3/8	R290	6	3
FBB-90BG-HC	31.6	1,786	818	90 3/8	27 1/8	37	331	364	3.5	115/60/1	3/8	R290	6	3
FBB-95BG-HC	33.6	1,875	858	95 1/4	27 1/8	37	348	384	3.5	115/60/1	3/8	R290	6	3

* FBB-23BG-HC height includes 4" castor

* Heights do not include castor, Castors are optional.

12 oz Bottle

Height : 5.82" (148.3mm)
Bottom Diameter : 3.413" (87.3mm)




12 oz Can

Height : 4.12" (104.3mm)
Bottom Diameter : 2.58" (65.3mm)



PLAN VIEWS

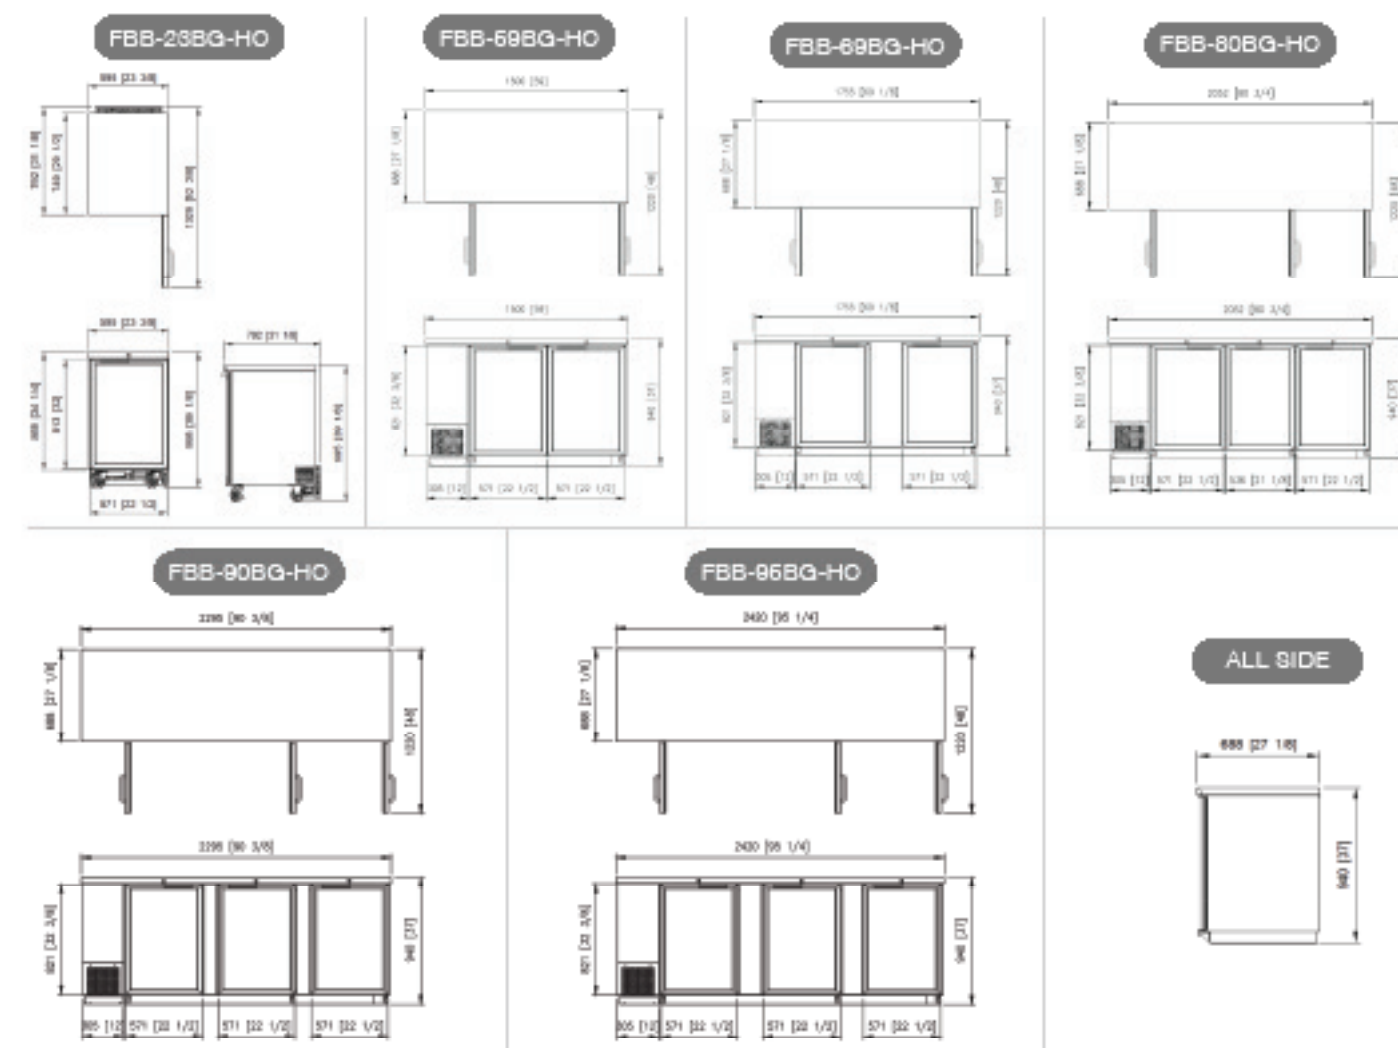

Narrow Back Bar - Solid Door

FEATURES & BENEFITS



FNB-48B-HC



FNB-60B-HC



FNB-72B-HC

Strong & Durable Cabinet Finish

Heavy duty stainless steel finished top.
Stainless or galvanized interior available.

Insulation PE coated sturdy wire shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet.

User Friendly Features

Side mount compressor provides space-efficient front breathing system

Automatic evaporation & defrost system

Locks for security

Cabinet design to accommodate for all types of cans and bottles

Sturdy and easy grip handles and Doors that open effortlessly

Magnetic door gasket provides easy to remove for cleaning or replacement

Efficient and Economical Work Space for Tight Work Place

Enhanced Airflow Hold Product Temperature 32°F~41°F

Glass Door Models Available

Energy saving LED lights

Transparent glass door for more excellent product display

Model Options

M1: Magnificent black laminated exterior and galvanized steel interior

M2: Clean and simple looking stainless exterior and interior

Available with 3", 4" or 5" diameter castors (Optional)

SPECIFICATIONS

Model	Capacity			Exterior Dimension (inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Shelves	No. Doors
	cu.ft	Can	Bottle	W	D	H								
FNB-48B-HC	11.6	714	336	48 1/4	23 7/8	35 3/8	168	181	3.5	115/60/1	3/8	R290	4	2
FNB-60B-HC	15.6	966	468	60 1/4	23 7/8	35 3/8	212	231	3.5	115/60/1	3/8	R290	4	2
FNB-72B-HC	19.6	1,218	588	72 1/4	23 7/8	35 3/8	268	271	3.5	115/60/1	3/8	R290	6	3

* Heights do not include castor

12 oz Bottle

Height : 9.02" (229.1mm)
Bottom Diameter : 2.413" (61.3mm)







12 oz Can

Height : 4-1/2" (114.3mm)
Bottom Diameter : 2-3/8" (60.3mm)



PLAN VIEWS

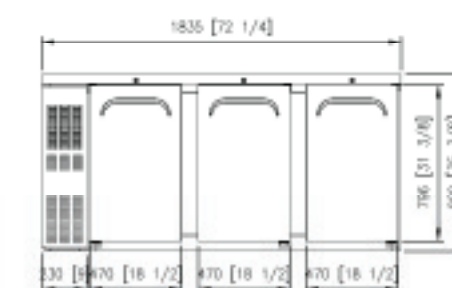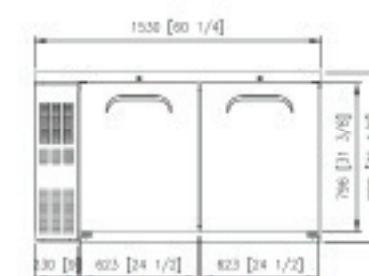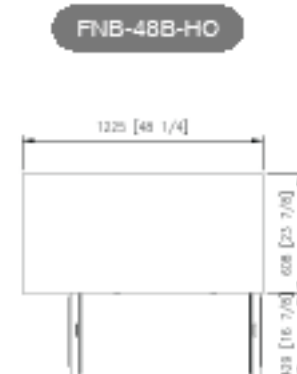

Narrow Back Bar - Glass Door

FEATURES & BENEFITS



FNB-48BG-HC



FNB-60BG-HC



FNB-72BG-HC

Strong & Durable Cabinet Finish

Heavy duty stainless steel finished top.
Stainless or galvanized interior available.

Insulation PE coated sturdy wire shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

User Friendly Features

Side mount compressor provides space-efficient front breathing system
Automatic evaporation & defrost system
Transparent glass door for clear product display
Cabinet design to accommodate for all types of cans and bottles
Sturdy and easy grip handles and Doors that open effortlessly
Magnetic door gasket provides easy to remove for cleaning or replacement

Efficient and Economical Work Space for Tight Work place

Enhanced Airflow Hold Product Temperature 32°F~41°F

Modern Shaped Glass Door

Energy saving LED lights
Transparent glass door for more excellent product display

Model Options

M1: Magnificent black laminated exterior and galvanized steel interior
M2: Clean and simple looking stainless exterior and interior

Available with 3", 4" or 5" diameter castors (Optional)

SPECIFICATIONS

Model	Capacity			Exterior Dimension (Inch)			Net Weight (lb)	Gross Weight (lb)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Shelves	No. Doors
	cu.ft	Can	Bottle	W	D	H								
FNB-48BG-HC	11.6	714	336	48 1/4	23 7/8	35 3/8	198	212	3.5	115/60/1	3/8	R290	4	2
FNB-60BG-HC	15.6	966	468	60 1/4	23 7/8	35 3/8	225	245	3.5	115/60/1	3/8	R290	4	2
FNB-72BG-HC	19.6	1,218	588	72 1/4	23 7/8	35 3/8	262	284	3.5	115/60/1	3/8	R290	6	3

* Heights do not include castors; castors are optional

12 oz Bottle

Height: 9.02" (229.1mm)
Bottom Diameter: 2.41" (61.3mm)









12 oz Can

Height: 4.12" (104.3mm)
Bottom Diameter: 2.35" (59.7mm)



PLAN VIEWS

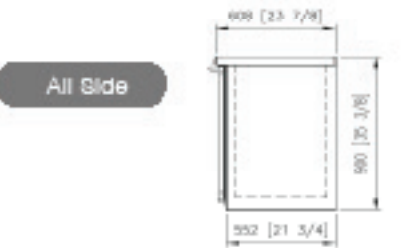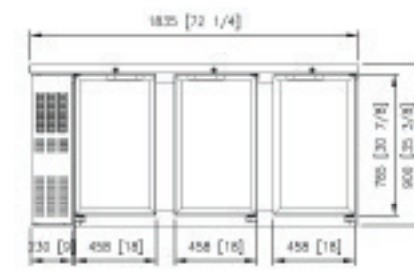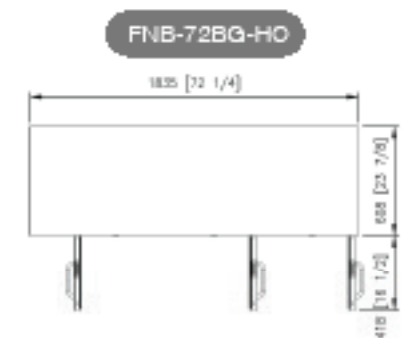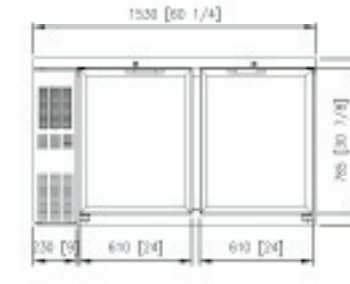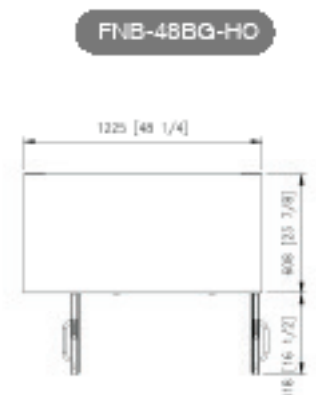

DISPLAY CASE

- **Vertical Open Air Display - Solid Side**
- **Vertical Open Air Display - Glass Side**
- **Counter Top Refrigerator**
- **Rectangular Bakery Case**



Vertical Open Air Display - Solid Side

FEATURES & BENEFITS



FOD-36VS

FOD-48VS

FOD-60VS

FOD-72VS

Strong & Durable Cabinet Finish

- Clean-looking white coated steel interior walls and deck (*Stainless steel option available)
- Black coated exterior (Standard)
- White coated steel shelves
- Modern and durable one-piece grill

High Density Polyurethane Insulation

- Foamed in place high density polyurethane insulation used throughout the cabinet

Attractive Merchandising

- Open front enables convenient product access, fast service and attractive display
- Electronic control with exterior digital display (Optional)
- Automatic evaporation & defrost system
- LED sign panel
- Energy saving LED lights (5 Column LED Lamps)

Energy Saving Night Curtains

- Helps save energy and maintain cabinet temperature (Standard)

Enhanced Airflow Hold Product Temperature 38°F--44°F


- Operate under the ambient temperature and humidity do not exceed 75°F and 55% respectively

Leg Levelers are standard (Castors are Available)

SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimension (inch)			Net Weight (lb)	Gross Weight (lb/kg)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Shelves	No. Night Curtains
		W	D	H								
FOD-36VS	19.6	36 1/8	32 1/2	80 1/8	437	472	16.5	115/60/1	1	R-404A	4	1
FOD-48VS	26.7	48 1/8	32 1/2	80 1/8	525	560	16.5	115/60/1	1	R-404A	4	1
FOD-60VS	33.9	60 1/8	32 1/2	80 1/8	591	633	16.5	115/60/1	1	R-404A	4	2
FOD-72VS	41.0	72 1/8	32 1/2	80 1/8	743	791	15	115/208-230/60/1	1 x 2	R-404A	8	2

PLAN VIEWS

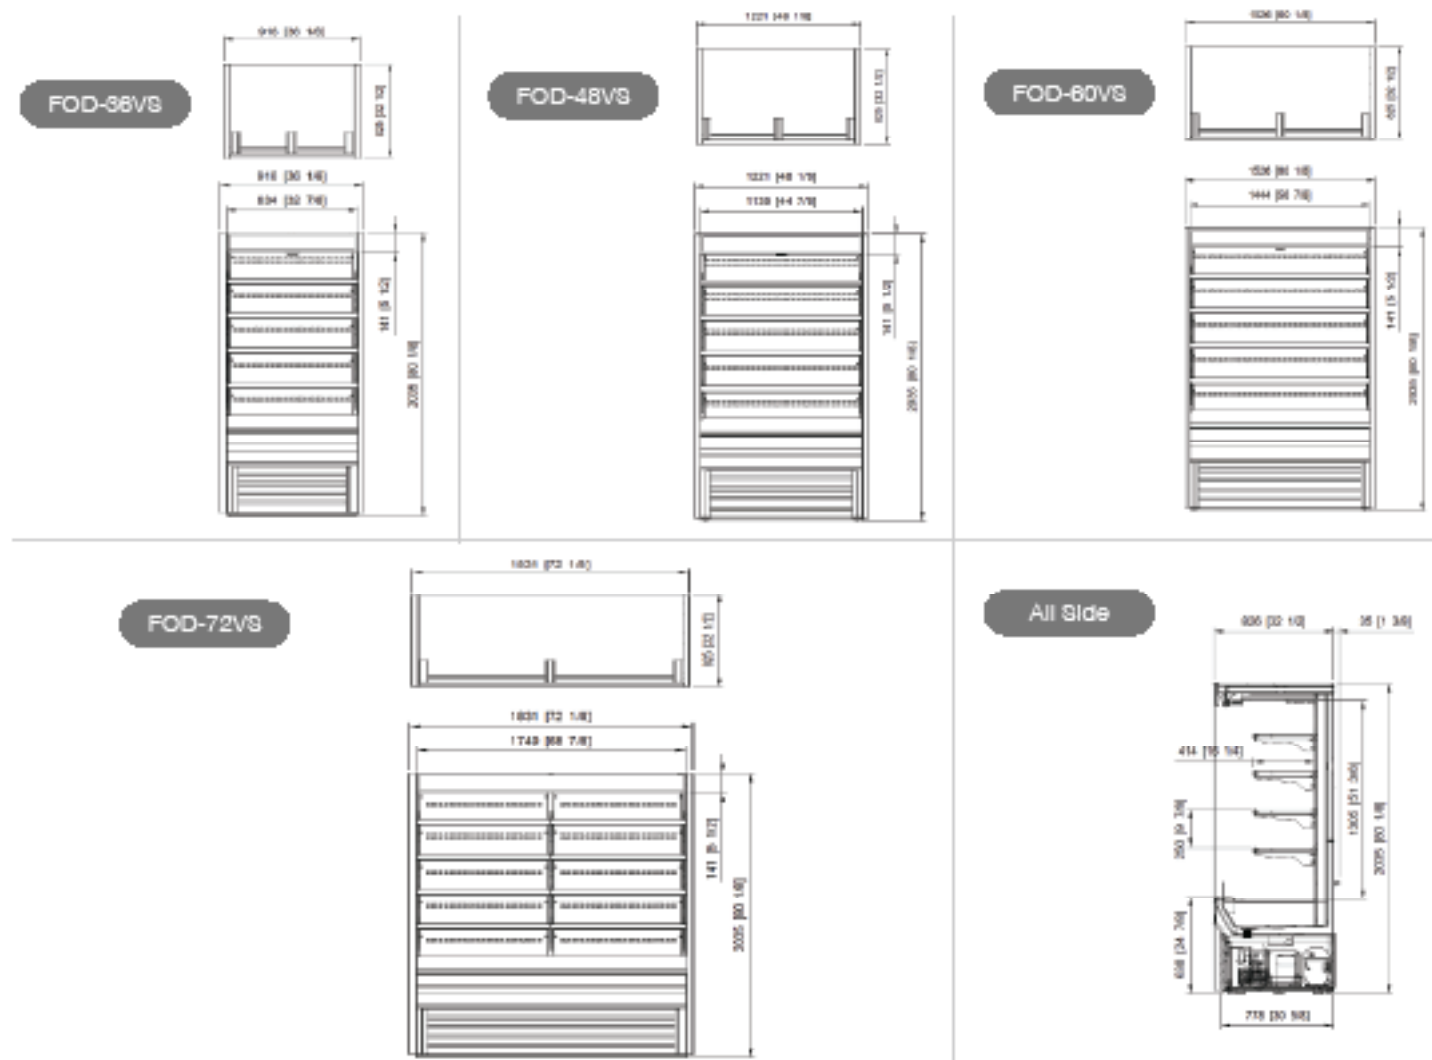

Vertical Open Air Display - Glass Side

FEATURES & BENEFITS



FOD-36VG

FOD-48VG

FOD-60VG

FOD-72VG

Strong & Durable Cabinet Finish

- Clean-looking white coated steel interior walls and deck (Stainless available)
- Black coated exterior (Standard)
- White coated steel shelves (Standard)
- Modern and durable one-piece grill

High Density Polyurethane Insulation

- Foamed in place high density polyurethane insulation used throughout the cabinet

Attractive Merchandising

- Open front enables convenient product access, fast service and attractive display
- Electronic control with exterior digital display (Optional)
- Automatic evaporation & defrost system
- LED sign panel
- Energy saving LED lights (5 Column LED Lamps)

Energy Saving Night Curtains

- Helps save energy and maintain cabinet temperature (Standard)

Enhanced Airflow Hold Product Temperature 38°F~44°F


- Operate under the ambient temperature and humidity do not exceed 75°F and 55% respectively

Leg Levelers Available

SPECIFICATIONS

Model	Capacity (cu.ft)	Exterior Dimension (Inch)			Net Weight (lb)	Gross Weight (lb/kg)	Amps	Voltage (V/Hz/Ph)	HP	Refrigerant	No. Shelves	No. Night Curtains
		W	D	H								
FOD-36VG	19.6	36 1/8	32 3/4	80 3/4	483	518	16.5	115/60/1	1	R-404A	4	1
FOD-48VG	26.7	48 1/8	32 3/4	80 3/4	529	604	16.5	115/60/1	1	R-404A	4	1
FOD-60VG	33.9	60 1/8	32 3/4	80 3/4	637	679	16.5	115/60/1	1	R-404A	4	2
FOD-72VG	41.0	72 1/8	32 3/4	80 3/4	785	836	15	115/208-230/60/1	1 + 2	R-404A	8	2

PLAN VIEWS

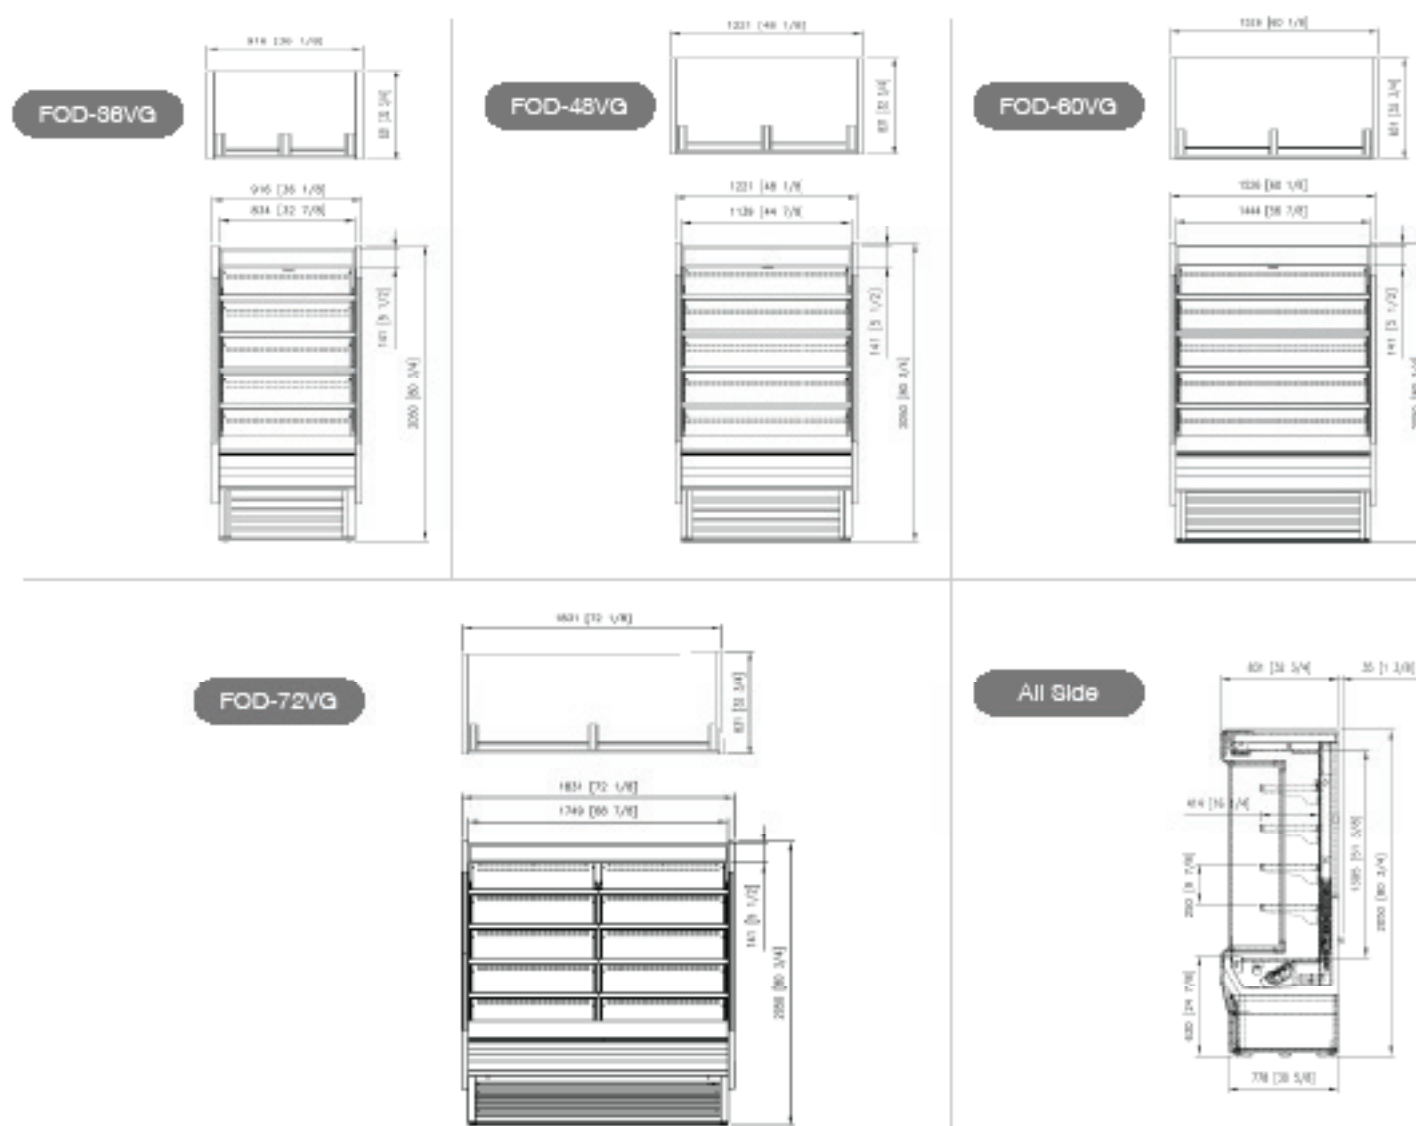

FEATURES & BENEFITS



FCT-7RG-HC (Black)



FCT-7RS-HC (Black)



FCT-7RS-HC (White)

Strong & Durable Cabinet Finish

Clean-looking white coated steel interior walls
Black/White laminated coated steel exterior

Insulation PE coated sturdy wire shelves

High Density Polyurethane Insulation

Foamed in place high density polyurethane insulation used throughout the cabinet

Attractive Merchandising

Lighted sign panel available
Compact size suiting for mounting on the counter

Automatic Evaporation & Defrost System

Thermal Insulated Energy Saving Tech Glass Door

Safety shielded LED lighting interior.

Bright and clear interior LED for excellent visibility

Refrigerator Hold Product Temperature 36°F--41°F




Locks Available (Optional)

Model with and without Side Glass Window

SPECIFICATIONS

Model	Capacity (cu.ft/ft³)	Exterior Dimension (inch/mm)			Net Weight (lb/kg)	Amps	Voltage (V/Hz/Ø)	HP	Refrig- erant	No. Shelves	No. Doors
		W	D	H							
FCT-7R-HC	6	21 1/4	25 1/2	37 7/8	127	3.1	115/60/1	1/4	R290	2	1

PLAN VIEWS

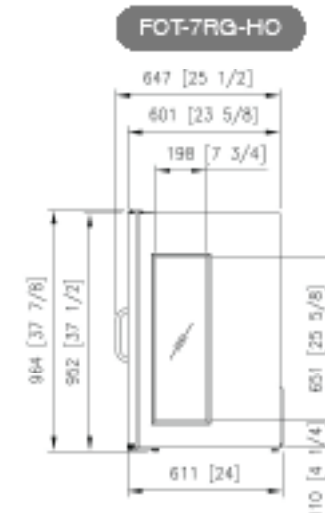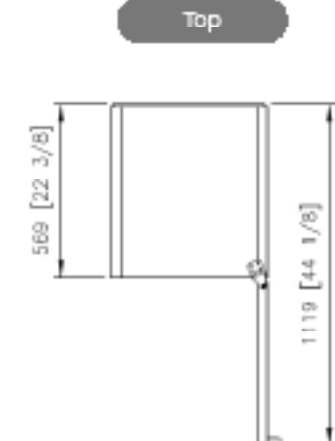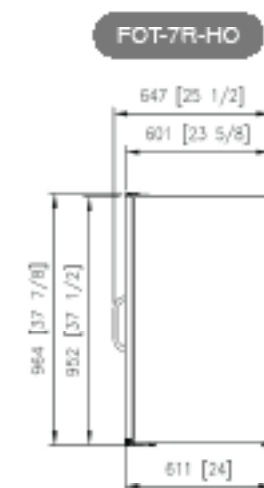

Rectangular Bakery Case

FEATURES & BENEFITS



FGR-36S-HC



FGR-48S-HC



FGR-60S-HC



FGR-72S-HC

Strong & Durable Cabinet Finish

- Double pane glasses
- Stainless steel deck and air flow grille

System

- Self contained system, no plumbing required
- Electronic temperature control
- Hot pipe water evaporating system

Attractive Merchandising

- Straight, tempered front & side glass

Components

- LED lighting interior
- Sliding rear 2 doors for product loading & unloading
- Stainless steel framed adjustable & tempered glass shelves
- Adjustable legs

Enhanced Airflow Hold Product Temperature 32°F~41°F (0°C~5°C)

Model Options


- Caster model available

SPECIFICATIONS


Model	Capacity	Light	Exterior Dimension (Inch)			Net Weight (lb/kg)	Gross Weight (lb/kg)	Plug Type	Voltage (V/Hz/Ø)	Cooling Type	Refrigerant	Shelf Size
	cu.ft./		W	D	H							
FGR-36S-HC	13.7	LED	35 1/4	33 1/32	54 7/8	410	13.7	NEMA 5-15 p	115/60/1	Hot pipe	R290	32 1/3*16 1/3
	389		895	839	1,394	186	389					820*415
FGR-48S-HC	18.5	LED	47 1/4	33 1/32	54 7/8	483	18.5	NEMA 5-15 p	115/60/1	Hot pipe	R290	44 1/3*16 1/3
	524		1,200	839	1,394	219	524					1,125*415
FGR-60S-HC	23.3	LED	59 1/4	33 1/32	54 7/8	545	23.3	NEMA 5-15 p	115/60/1	Hot pipe	R290	56 1/3*16 1/3
	660		1,505	839	1,394	247	660					1,430*415
FGR-72S-HC	28.1	LED	71 1/4	33 1/32	54 7/8	655	28.1	NEMA 5-15 p	115/60/1	Hot pipe	R290	68 1/3*16 1/3
	796		1,810	839	1,394	297	796					1,735*415

PLAN VIEWS


FGR-36S-HC

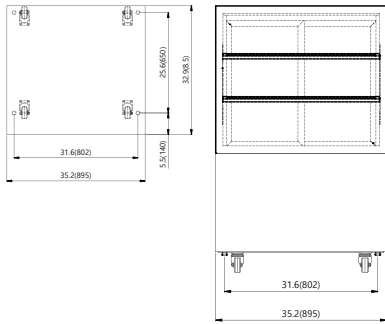


FGR-48S-HC

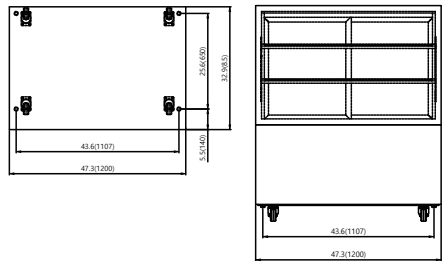


FGR-60S-HC

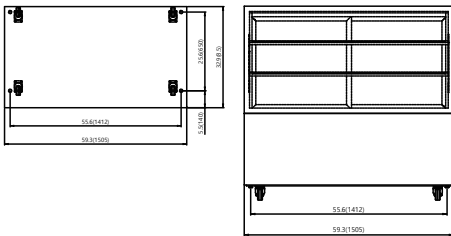

FGR-72S-HC

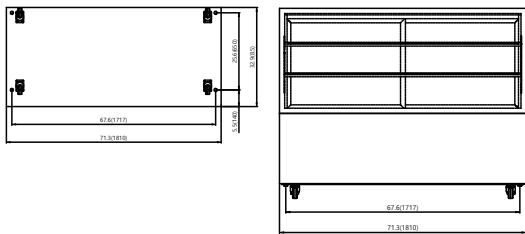

ALL SIDE



- **Blast Freezer/Chiller**



FEATURES & BENEFITS



FBF-5

FBF-8

FBF-12

Strong & Durable Cabinet Finish
Stainless steel finished top, front, sides and doors
Stainless steel finished Interior

SYSTEM
Easy-to-use digital display temperature control & monitor
Hot gas condensate system
Forced air refrigeration system
Manual and automatic defrost cycles

TEMPERATURE
Soft chilling: +194°F(90°C) to 37.4°F(3°C) within 90 mins (Max Temp: 32°F(0°C))
Hard chilling: +194°F(90°C) to 37.4°F(3°C) within 90 mins (Max Temp: -4°F(-20°C))
Freezing: +194°F(90°C) to -0.4°F(-18°C) within 240 mins (Max Temp: -40°F(-40°C))

User Friendly Features
Sealed Interior floors and rounded cabinet corners
Easy-to-Clean interior design and parts
Increase production capacity while saving cost and time
Accommodable different Pans with adjustable rails


COMPONENTS
Heated door frame
Drain Pan with condensate heater
Stainless steel heavy duty hinges
Various pans accommodatable rack rails

SPECIFICATIONS


Model	Capacity (cu.ft/ℓ)	Exterior Dimension (Inch/mm)			Exterior Dimension (Inch/mm)			Net Weight (lb/kg)	Amps	Voltage (V/Hz/Ø)	HP	Refrigerant	No. Pan
		W	D	H	W	D	H						
FBF-5	4.94	32.3	33.1	36.5	32.3	33.1	36.5	132	5.2	220~240 /50,60/1	1	R-404A	5
	140	820	840	928	820	840	928	236					
FBF-8	7.35	32.3	33.1	52.3	32.3	33.1	52.3	262	8.7	220~240 /50,60/1	1 1/2	R-404A	8
	208	820	840	1,328	820	840	1,328	302					
FBF-12	10.5	32.3	33.1	67.6	32.3	33.1	67.6	331	8.7	220~240 /50,60/1	1 1/2	R-404A	12
	298	820	840	1,718	820	840	1,718	348					

PLAN VIEWS


ALL TOP



FBF-5

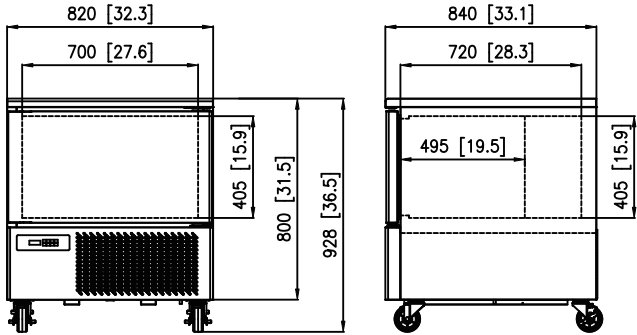

FBF-8

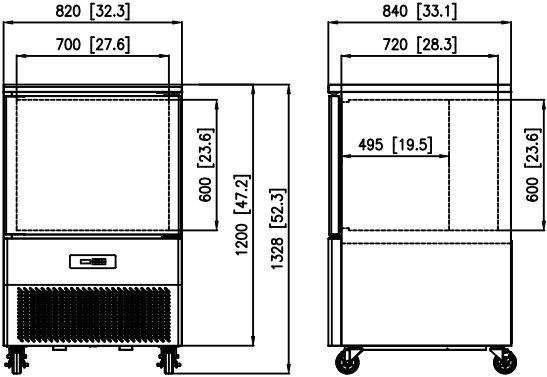

FBF-12

